




Heater Elements

**Glocoil®,
Heater Receptacle,
Lighter Element**

Heater Elements

FEATURES

- Used for testing equipment when additional wattage or amperage is needed.
- Shell constructed of high-temperature porcelain.
- Heater receptacle constructed of high-temperature porcelain.

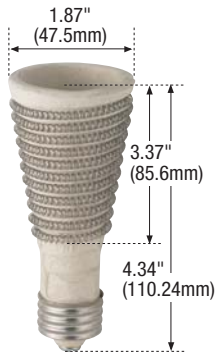

415A-120



602



444-120

Glocoil® Elements

| Watts | Description | Catalog No. | |
|------------|---------------------|--------------|--------------|
| | | 120 Volts | 220 Volts |
| 600 to 660 | Conical | 415A-120-660 | 415A-220-660 |
| 1000 | Conical | 415A-120-1M | — |
| 600 to 660 | Straight | 415-120 | 415-220 |
| 1000 | Straight Industrial | 411 | 411-2 |

Heater Receptacle

| Rating Watts | V/AC | Description | Catalog No. |
|-----------------|------|-------------------|-------------|
| 660 | 250 | 2 Piece Porcelain | 602 |

Lighter Element

FEATURES

- For use where open flame is restricted as in prisons, laboratories and other institutions.

Lighter Elements

| Rating Watts | V/AC | Description | Catalog No. |
|-----------------|------|-------------|-------------|
| 85 | 120 | Medium Base | 444-120 |

INDUSTRIAL
COMMERCIAL
RESIDENTIAL

V-7
ELECTRICAL
ACCESSORIES

TESTING & CODE COMPLIANCE

- Cat. No. 602:
UL Listed
(file no. E7430.
Meets all UL 496
requirements.
- CSA Certified
(file no. 1739
(6231-07)).
Meets all
CSA requirements,
C22.2 no. 43.
- NOM Certified.
- 415A-120 and
415-120 are CSA
Certified (file no.
2254 (2871-02)).